



RAC High Precision Satellite Positioning Receiver Specification

RAC high precision GNSS receiver

Achieve high-precision satellite positioning without differential stations and ground-based augmentation networks

Real-time Array Calibration

Product Model: RAC-C1P

Hardware version: RAC-D0030124R_V1.0

Software Version: C1P_BSS_V1.0_200827



Document Revision History

Version	Revision Date	Version described
V1.0	2020/09/10	New Document
V1.1	2021/06/09	Document optimization

Disclaimer

Shenzhen BroadGNSS Technology has the right to modify this manual at any time. Content is subject to change without notice. The company does not assume any form of guarantee and assumes no responsibility for errors contained in this manual or accidental or consequential damages caused by the contents of this manual.



Table of contents

1. Product Description.....	5
1.1 Product Overview.....	5
1.2 Product Features.....	5
1.3 Certification Testing.....	6
1.4 Product Application.....	6
1.5 Performance Indicators.....	6
1.6 Product port definition.....	8
1.7 Functional Block Diagram.....	8
1.8 Product Dimensions.....	9
1.9 Interface terminal dimensions.....	10
2. Input and Output Statements.....	10
2.1 Input Statement.....	10
2.1.1 Instruction Format.....	10
2.1.2 Instruction Description.....	10
2.1.3 Command List.....	11
2.2 Output Statements.....	13
2.2.1 NMEA 0183protocol.....	13
2.2.2 UBXprotocol.....	18
2.3 Reference Procedure.....	29
2.3.1 NMEA0183 Protocol Verification Reference Procedure.....	29
2.3.2 UBXProtocol Verification Reference Procedure.....	30
3. Contact Us.....	31
IV. Appendix 1 (Test Method).....	31



4.1 Overview.....	32
4.2 Test content.....	32
4.2.1 Test Preparation.....	32
4.2.2 Test steps.....	33
4.2.3 Test Examples.....	34
V. Appendix 2 (Test Report).....	36
5.1 Overview.....	36
5.2 Test platform.....	36
5.3 Test Results.....	37
5.3.1 Static Test.....	37
5.3.2 Dynamic Test.....	37



1. Product Description

1.1 Product Overview

Product Name: RAC-C1P High-precision satellite positioning receiver



Figure 1.1 Appearance of RAC-C1P high-precision satellite positioning receiver

The RAC-C1P product has a weak signal compensation function, which can improve the positioning performance of the GNSS receiver in practical applications at the lowest cost and effectively reduce the impact of the multipath effect. RAC-C1P is a G-MOUSE-like satellite receiver (hereinafter referred to as G-MOUSE), which is a complete GPS satellite positioning receiver; it has a built-in satellite receiving antenna and has a full range of high-precision positioning functions. The positioning accuracy can reach less than 1.0 meters in static and less than 0.6 meters in dynamic; it can meet the strict requirements of industrial-grade positioning and personal use needs. Through technological innovation, the product has two core competitive advantages, namely, no differential station is required, no L2 or B3 precision code is used, and the cost is low. Unlike traditional high-precision satellite positioning technology, our technology gets rid of the differential technology that high-precision satellite positioning relies on, which greatly reduces the cost. This is our most important advantage over similar products in the world.

1.2 Product Features

- ◆ UART (3.3V_TTL level)/RS232/IIC/CAN interface output, faster application;
- ◆ Using KDS 0.5PPM high-precision TCXO;
- ◆ Rich data output rate: 115200bps (default) [optional: 9600/38400];
- ◆ Output statement: NMEA0183/UBX protocol;
- ◆ Support adjustable data refresh rate: 1Hz-10Hz;
- ◆ Independently develop and design the antenna vibrator to ensure that the phase center coincides with the geometric center, minimizing the impact of the antenna on measurement errors;
- ◆ GPS, BD, GLONASS hybrid engine optional;
- ◆ Manufactured using lead-free technology, compliant with RoHS standards.



1.3 Certification Testing

The positioning chip has passed AEC-Q100 certification.

The positioning module has passed ISO16750 test.

The positioning products have passed ISO7637 test.

The production line complies with ISO/TS-16949 certification.

The shell protection grade reaches IP65.

1.4 Application

Unmanned driving, positioning navigation and tracking products;

UAV field, agricultural plant protection machine, precision agriculture;

Synchronize UTC time and timing field;

Widely used in waterway surveying and ocean surveying;

Products such as track recording and GPS data point calibration;

Surveying and mapping products such as high-precision mapping, area measurement and distance measurement;

Road construction, earthquake monitoring, bridge deformation monitoring, landslide monitoring, terminal container operations, etc.

1.5 Performance Indicators

Sensitivity	Track	- 167dBm
	Capture	- 160dBm
	Cold Start	- 148dBm
	Hot Start	- 159dBm
TTFF (Time to First Fix)	Cold Start	Average ≤30S
	Warm start	Average<5S
	Hot Start	Average<2S
Type	GPS L1 1575.42MHz C/A BDS B1 1561.098MHz	



Positioning accuracy	External static positioning accuracy:1.0m (2σ)	
	External dynamic positioning accuracy:0.6m (2σ)	
	Internal static positioning accuracy:0.2m (2σ)	
	Internal dynamic positioning accuracy:0.5m (2σ)	
	Coordinate system	Coordinate basis:WGS-84
Speed accuracy	0.05m/s	
Time pulse (configurable)	1s (default)	
Update rate	1-10Hz (Optional)	
PPS	100ms (1pps=1Hz=1times/second)	
Operational restrictions	High	<80000m
	Speed	<500m/s
	Acceleration	<4g
Data Format	NMEA 0183 General Protocol Default output information: NMEA-0183-RMC	

Power Specifications

Power supply	DC 5.0V(Ripple voltageVpp<200mv)
Working current	Track: 160mA Capture: 180mA Peak: 200mA
Standby current	<5uA
Functional Interface	UART/IIC/RS232/CAN

Physical Properties

Temperature	Operating temperature	- 40°C~85°C
	Storage temperature	- 40°C~85°C




1.6 Product port definition

The product output can support UART, RS232 or IIC output, etc. The default is UART output (IIC, etc. can be expanded). The specific port definition is shown in the figure below:

Pin NO.	Pin Name	I/O	Remark
1	GND	land	Ground (yellow line)
2	VCC	power supply	DC 5.0VPeak current206mA(Red line)
3	RX	enter	TTLSerial port receiving (blue line)
4	TX	Output	TTLSerial port send (white line)
5	SDA	data	Reserved geomagnetic IIC data (green)
6	SCL	clock	Reserved geomagnetic IIC clock (orange)

1.7 Functional Block Diagram

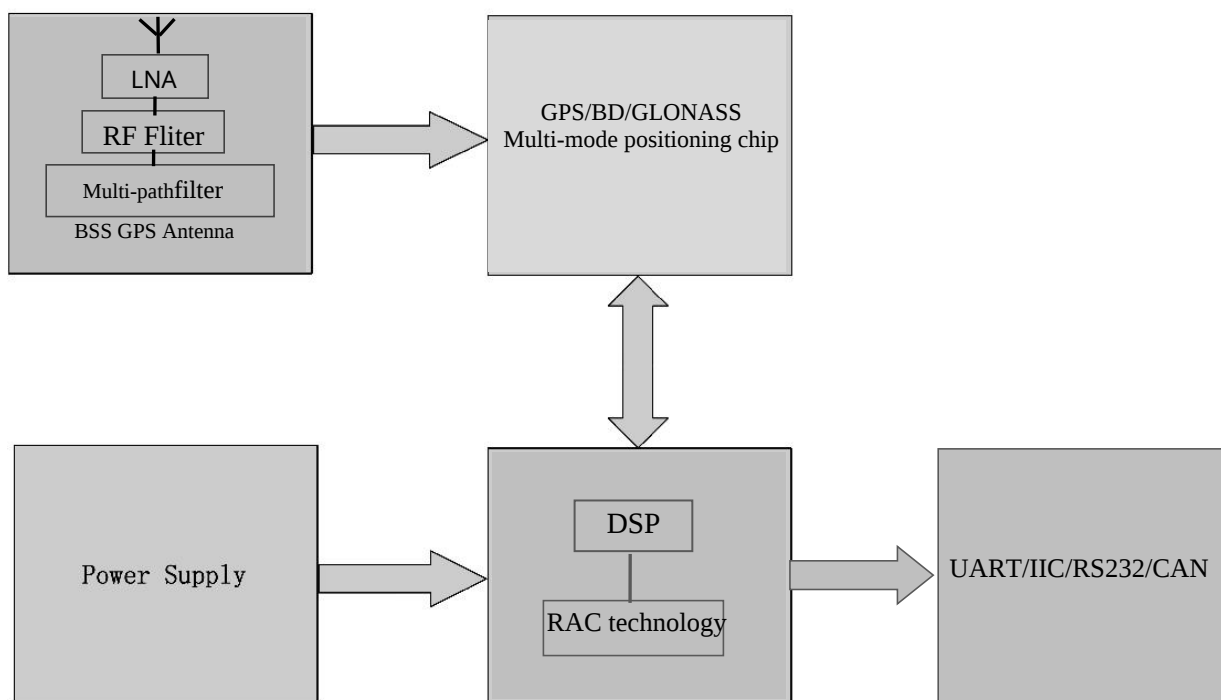




The RAC-C1P high-precision positioning receiver features a high-precision antenna, with an antenna oscillator that is independently developed and designed to ensure that the phase center aligns with the geometric center, minimizing the impact of antenna measurement errors. The antenna receives satellite signals from the sky and transmits them to the chip's RF unit. The RF unit then passes the signals to the chip's baseband unit, where the signals are processed and analyzed. Afterward, the data is sent to the DSP (Digital Signal Processor), where it is further processed using RAC's self-developed algorithm. The processed high-precision positioning data and 1PPS signals are output via serial port, RS232, and CAN interfaces, while magnetometer data is output via the IIC interface.

1.8 Product size

Overall size: Length 151mm*high 45mm


PCB Size: Diameter 120mm*high 12mm

Bottom case screw specifications: Standard M5 Specifications (full thread)

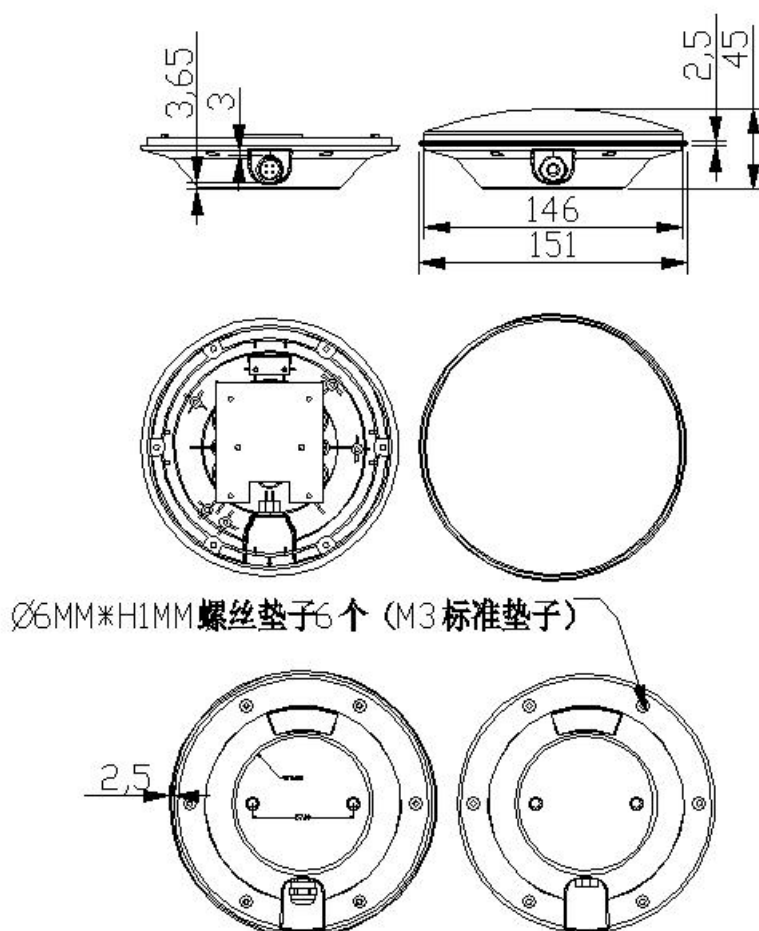



1.9 Interface terminal size

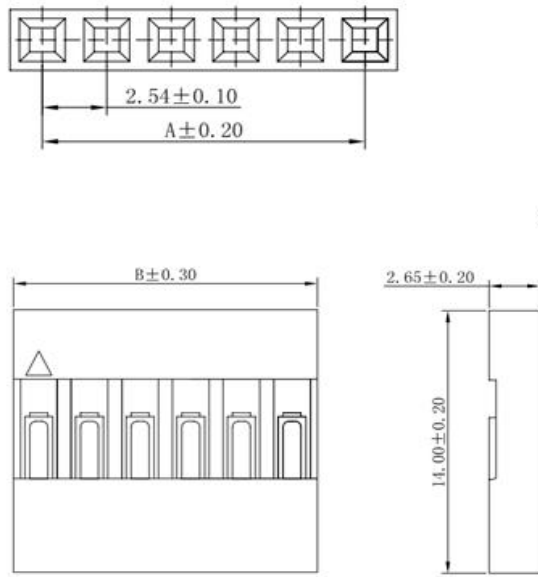

H2544-04: 7.62*10.16mm

1*4P 2.54mm pitch DuPont terminal

2. Input and Output Statements

2.1 Input Statement

2.1.1 Instruction Format

BSS-(command 1)-(command 2)-(command 2).....(command n) (CR)(LF)

2.1.2 Instruction Description

BSS is the command header, and every command must start with BSS.

Each command must be separated by a hyphen ("-").

Every command must end with a Carriage Return and Line Feed (CRLF).

When selecting the NMEA0183 protocol mode, RMC is the default output.

In the UBX protocol, the following 5 types of information are output by default: posllh, sol, dop, velned, and status.

When switching from NMEA protocol to UBX protocol or vice versa, a power cycle is required. If the ephemeris data is stored in a battery, the device should be powered off for several hours, allowing the battery to deplete before the changes take effect.



2.1.3 Command List

Order	Illustrate
0183	Choose one of the two, indicating that the NMEA0183 protocol is selected
UBX	Choose one of the two, indicating that the UBX protocol is selected
115200	Select one of the three options, indicating the serial port baud rate is 115200
38400	Select one of the three options, indicating the serial port baud rate is 38400
9600	Select one of the three options, indicating the serial port baud rate is 9600
10HZ	Select one of the three options, indicating that the serial port output frequency is 10HZ
5HZ	Select one of the three options, indicating that the serial port output frequency is 5HZ
1HZ	Select one of the three options, indicating that the serial port output frequency is 1HZ
RHXZ	Indicates that the geomagnetic sensor is enabled.
D10	Choose one of the three, indicating that the number of geomagnetic outputs in one frame of GPS time is 10 times
D5	Choose one of the three, indicating that the number of geomagnetic outputs in one frame of GPS time is 5 times
D1	Choose one of the three, indicating that the number of geomagnetic outputs in one frame of GPS time is 1
VTG	GPVTG command, only enabled when NMEA0183 protocol is selected
GGA	GPGGA command, only enabled when NMEA0183 protocol is selected
PVT	PVT command, only enabled when UBX protocol is selected
ALL	Only valid for NMEA0183 protocol, all commonly used GPS commands are enabled, including RMC, VTG, GGA, GSA, GSV, to facilitate observation of satellite information

Note: Due to the relatively low data transmission rate of the serial port, the output frequency of a single GPS data frame and magnetometer data is closely related. Incorrect settings may lead to data output errors or loss.

Simplified Commands: When only the RMC command is output:

With a serial baud rate of 9600, the maximum serial output frequency is 10Hz, and the magnetometer output is D1.

With a serial baud rate of 38400, the maximum serial output frequency is 10Hz, and the magnetometer output is D10.

With a serial baud rate of 115200, the maximum serial output frequency is 10Hz, and the magnetometer output is D10.



Multiple Commands: When outputting multiple GPS commands:

With a serial baud rate of 9600, the serial output frequency can only be 1Hz, and the magnetometer output is D1.

With a serial baud rate of 38400, the maximum serial output frequency is 5Hz, and the magnetometer output is D5.

With a serial baud rate of 115200, the maximum serial output frequency is 10Hz, and the magnetometer output is D10.

Examples:

1. Change to NMEA0183 Protocol, baud rate 115200, frequency 10Hz, enable VTG, GGA, and magnetometer. The magnetometer output is one frame, and GPS outputs one magnetometer information. The command is:

BSS-0183-115200-VTG-GGA-10HZ-RHXZ-D1\r\n

2. Change to UBX Protocol, baud rate 115200, frequency 10Hz, enable PVT and magnetometer. The magnetometer output is one frame, and GPS outputs one magnetometer information. The command is:

BSS-UBX-115200-10HZ-PVT-RHXZ-D1\r\n

3. NMEA0183 Protocol Output Command Modification:

To output only RMC sentence:

BSS-0183-115200-10HZ\r\n

To output both RMC and GGA sentences:

BSS-0183-115200-10HZ-GGA\r\n

To output all 0183 Protocol Sentences:

css

BSS-0183-115200-10HZ-ALL\r\n

4. Modify NMEA0183 Protocol Baud Rate and Frequency:

For 9600 baud and 1Hz frequency, output all sentences:

css

BSS-0183-9600-1HZ-ALL\r\n

(Simply replace the baud rate and frequency as needed.)

Successful Modification Confirmation:

Once the modification is successful, the serial terminal will display the following:


```
-----,-----,----- --
Seting parameter success
Saving parameter
Saving parameter success
reseting system
Please wait
```



2.2 Output Statement

2.2.1 NMEA 0183 protocol

NMEA 0183 is a standard format developed by the National Marine Electronics Association (NMEA) for marine electronic devices. It has now become the unified RTCM (Radio Technical Commission for Maritime Services) standard protocol for GPS navigation equipment. The NMEA 0183 protocol uses ASCII code to transmit GPS positioning information. The data format and protocol framework are as follows:

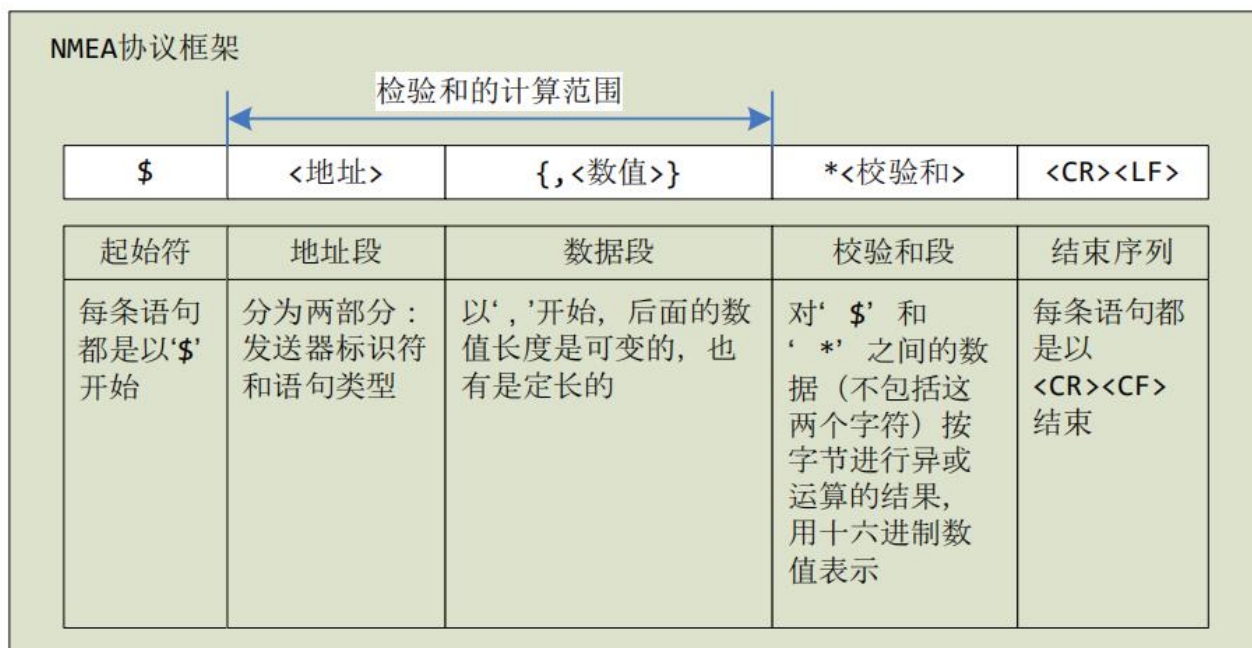

Statement output:

	Information	Illustrate
1	RMC	Recommended minimum dedicated navigation data
2	VTG	Ground speed and heading
3	GGA	Receiver positioning data
4	GSA	DOP and effective satellites
5	GSV	Visible satellites
6	GLL	Geographic location - Latitude/Longitude
7	RHXZ	Geomagnetic information

2.2.1.1 Minimum dedicated navigation data recommended by RMC

Information	RMC
Describe	Recommended minimum positioning information
Type	Output
Format	\$-- RMC,UTCtime,status,lat,uLat,lon,uLon,spd,cog,UTCdate,mv,mvE,mode*CS<CR><LF>
Example	\$GNRMC,084103.00,A,2233.39544,N,11356.55665,E,0.035,,220618,,,A*7A



Parameter Description			
Fields	name	Format	Parameter Description
1	\$--RMC	String	Message ID, RMC statement header, '--' is the system identifier
2	UTC time	hhmmss.ss	The current location's UTC time
3	status	character	Position valid flag. V = invalid data A = valid data
4	lat	ddmm.mmmmm	Latitude, the first two characters represent degrees, the following characters represent minutes
5	uLat	character	Latitude direction: N-North, S-South
6	lon	dddmm.mmmmm	Longitude, the first 3 characters represent degrees, the following characters represent minutes
7	uLon	character	Longitude direction: E-East, W-West
8	spd	Numeric	Ground speed, in knots
9	cog	Numeric	True heading relative to the ground, in degrees (output is empty when static)
10	UTC date	ddmmyy	Date (dd for day, mm for month, yy for year)
11	mv	Numeric	Magnetic declination, in degrees. Fixed to be empty
12	mvE	character	Magnetic declination direction: E-East, W-West. Fixed to empty
13	Mode	character	Mode indication (A = autonomous positioning, D = differential, R = RTK, E = estimation, N = invalid data)
14	navStatus	character	Navigation status indicator (V means the device does not provide navigation status information) NMEA v4.1 and above only
15	CS	Hexadecimal value	Checksum, the XOR result of all characters between \$ and * (excluding \$ and *)
16	<CR><LF>	character	Carriage return and line feed

2.2.1.2 VTG Ground Speed and Course

Information		VTG	
Describe		Speed over ground and heading over ground information.	
Type		Output	
Format		\$--VTG,cogt,T,cogm,M,sog,N,kph,K,mode*CS<CR><LF>	
Example		\$GNVTG,75.20,T,,M,0.009,N,0.017,K,A*02	
Parameter Description			
Fields	name	Format	Parameter Description
1	\$--VTG	String	Message ID, VTG statement header, '--' is the system identifier
2	cogt	Numeric	Course relative to true north, in degrees
3	T	character	True north indication, fixed at T
4	cogm	Numeric	Heading relative to magnetic north, in degrees
5	M	character	Magnetic north indication, fixed at M
6	sog	Numeric	Ground speed, in knots
7	N	character	Speed unit is knot, fixed as N
8	kph	Numeric	Ground speed in kilometers per hour
9	K	character	Speed unit, kilometers per hour, fixed as K
10	mode	character	Mode indication (A = autonomous positioning, D = differential, R = RTK, E = estimation, N = invalid data)



11	CS	Hexadecimal value	Checksum, all characters between \$ and * (excluding \$ and *)XOR result
12	<CR><LF>	character	Carriage return and line feed

2.2.1.3 GGA receiver positioning data

Information		GGA	
Describe		Receiver time, location and positioning related data	
Type		Output	
Format		\$-- GGA,UTCtime,lat,uLat,lon,uLon,FS,numSv,HDOP,msl,uMsl,sep,uSep,diff Age,diffSta *CS<CR><LF>	
Example		\$GNGGA,235316.00,2959.99250,S,12000.00900,E,1,06,1.21,62.77,M, 0.00,M,,*7B	
Parameter Description			
Fields	name	Format	Parameter Description
1	\$--GGA	String	Message ID, GGA statement header, '--' is the system identifier
2	UTC time	hhmmss.ss	The current location's UTC time
3	lat	ddmm.mmmmm	Latitude, the first two characters represent degrees, the following characters represent minutes
4	uLat	character	Latitude direction: N-North, S-South
5	lon	dddmm.mmmmm	Longitude, the first 3 characters represent degrees, the following characters represent minutes
6	uLon	character	Longitude direction: E-East, W-West
7	FS	Numeric	GPS positioning status (0 = no positioning, 1 = non-differential positioning, 2 = differential positioning)
8	numSv	Numeric	The number of satellites used for positioning, 00~12
9	HDOP	Numeric	Horizontal Dilution of Precision (HDOP<1.2 is high-precision positioning)
10	msl	Numeric	Altitude, that is, the height of the receiver antenna relative to the geoid high
11	uMsl	character	Altitude unit, meter, fixed character M
12	sep	Numeric	The distance between the reference ellipsoid and the geoid, “ -” indicates The geoid is lower than the reference ellipsoid
13	uSep	character	Altitude unit, meter, fixed character M
14	diffAge	Numeric	Differential time (from the last differential signal received)Seconds, non-differential positioning, this item is empty)
15	diffStat	Numeric	The ID of the differential reference station (empty for non-differential positioning)
16	CS	Hexadecimal value	Checksum, all characters between \$ and * (excluding \$ and *)XOR result
17	<CR><LF>	character	Carriage return and line feed



2.2.1.4 GSA DOP and effective satellites

Information		GSA	
Describe		Satellite number and DOP information used for positioning.	
Type		Output	
Format		\$--GSA,smode,FS{,SVID},PDOP,HDOP,VDOP,systemId*CS<CR><LF>	
Example		\$GNGSA,A,3,05,21,31,12,18,29,,,,,2.56,1.21,2.25,1*01	
Parameter Description			
Fields	name	Format	Parameter Description
1	\$--GSA	String	Message ID, GSA statement header, '--' is the system identifier
2	smode	character	Mode switch indication (M = Manual, A = Automatic)
3	FS	number	Positioning status flag (1 = not positioned, 2 = 2D positioning, 3 = 3D positioning)
4	{,SVID}	Numeric	Satellite number used for positioning
5	PDOP	Numeric	Position Dilution of Precision (PDOP)
6	HDOP	Numeric	Horizontal Dilution of Precision (HDOP)
7	VDOP	Numeric	Vertical Dilution of Precision (VDOP)
8	systemId	Numeric	GNSS system ID defined by NMEA (Note [1]) NMEA v4.1 and above only
9	CS	Hexadecimal value	Checksum, all characters between \$ and * (excluding \$ and *)XOR result
10	<CR><LF>	character	Carriage return and line feed
Remark[1] GNSS system ID			
System ID		Describe	
1		GPS system	
2		GLONASS system	
4		BDS system	

2.2.1.5 GSV visible satellite information

Information		GSV	
Describe		The satellite number and elevation, azimuth, carrier-to-noise ratio, etc. of the visible satellite. The number of {satellite number, elevation, azimuth, carrier-to-noise ratio} parameter groups in each GSV sentence is variable, with a maximum of 4 groups and a minimum of 0 groups.	
Type		Output	
Format		\$--GSV,numMsg,msgNo,numSv{,SVID,ele,az,cn0}*CS<CR><LF>	
Example		\$GPGSV,3,1,12,02,39,117,25,04,02,127,,05,40,036,24,08,10,052,*7E \$GPGSV,3,2,12,09,35,133,,10,01,073,,15,72,240,22,18,05,274,*7B \$GPGSV,3,3,12,21,10,316,,24,16,176,,26,65,035,42,29,46,277,18*7A	
Parameter Description			
Fields	name	Format	Parameter Description
1	\$--GSV	String	Message ID, GSV statement header, '--' is the system identifier



2	numMsg	number	Each GSV sentence outputs information about up to 4 visible satellites. Therefore, when the system has more than 4 visible satellites, Multiple GSV statements will be required.
3	msgNo	number	Current statement number
4	numSv	Numeric	Total number of visible satellites
5	{,SVID,ele , az,cn0}	Numeric	They are: Satellite number; Elevation angle, ranging from 0 to 90, in degrees; Azimuth angle, ranging from 0 to 359, in degrees; Carrier-to-noise ratio, ranging from 0 to 99, in degrees. dB, if the current satellite is not tracked, the output is empty.
6	signalId	Numeric	GNSS signal ID defined by NMEA (0 represents all signals) NMEA v4.1 and above only
7	CS	Hexadecimal value	Checksum, all characters between \$ and * (excluding \$ and *)XOR result
8	<CR><LF>	character	Carriage return and line feed

2.2.1.6 GLL Geographic Location – Latitude/Longitude

Information		GLL	
Describe		Information such as latitude, longitude, positioning time and positioning status.	
Type		Output	
Format		\$--GLL,lat,uLat,lon,uLon, UTCtime,valid,mode*CS<CR><LF>	
Example		\$GNGLL,2959.99250,S,12000.00900,E,235316.00,A,A*4E	
Parameter Description			
Fields	Name	Format	Parameter Description
1	\$--GLL	String	Message ID, GLL statement header, '--' is the system identifier
2	lat	ddmm.mmmmm	Latitude, the first two characters represent degrees, the following characters represent minutes
3	uLat	character	Latitude direction: N-North, S-South
4	lon	dddmm.mmmmm	Longitude, the first 3 characters represent degrees, the following characters represent minutes
5	uLon	character	Longitude direction: E-East, W-West
6	UTC time	hhmmss.ss	The current location's UTC time
7	valid	character	Data status (A = valid positioning, V = invalid positioning)
8	mode	character	Mode indication (A = autonomous positioning, D = differential, E = estimated, N = invalid data)
9	CS	Hexadecimal value	Checksum, all characters between \$ and * (excluding \$ and *)XOR result
10	<CR><LF>	character	Carriage return and line feed



2.2.1.7 RHXZ geomagnetic information

Information		RHXZ	
Describe		Geomagnetic sensor information	
Type		Output	
Format		\$RHXZ,X,Y,Z*CS<CR><LF>	
Example		\$RHXZ,0057,FE6E,0210*45	
Parameter Description			
Fields	Name	Format	Parameter Description
1	\$RHXZ	String	Message ID, RHXZ statement header
2	X	Hexadecimal value	The hexadecimal value of the geomagnetic sensor X axis (high bit first, 0057 means 0x0057, range 0000~FFFF, the leading 0 will also be transmitted)
3	Y	Hexadecimal value	The hexadecimal value of the Y axis of the geomagnetic sensor (high bit first, FE6E means 0xFE6E, range 0000~FFFF, the leading 0 will also be transmitted)
4	Z	Hexadecimal value	The hexadecimal value of the Z axis of the geomagnetic sensor (high bit first, 0210 means 0x0210, range 0000~FFFF, the leading 0 will also be transmitted)
5	CS	Hexadecimal value	Checksum, all characters between \$ and * (excluding \$ and *)XOR result
6	<CR><LF>	character	Carriage return and line feed

2.2.2 UBX protocol

The UBX protocol is a proprietary protocol developed by u-blox, and it has the following key characteristics:

Compact: Uses 8-bit binary data.

Checksum protection: Employs a low-overhead checksum algorithm.

Modular: Uses a two-stage message identifier (Class and Message ID).

The structure of a UBX protocol packet is shown in Figure 1. As seen in the diagram, each message consists of three parts: header, data, and checksum. The header is two bytes: 0xB5 0x62, which identifies the start of a UBX protocol data transmission.

CLASS is one byte, representing the category of the test data message.

ID is one byte, indicating the specific parameter output under a given CLASS.

LENGTH indicates the length of the data section (in bytes).

CK_A and CK_B are two checksum bytes, used for data verification from the CLASS to the Payload section

SYNC Character 1	SYNC Character 2	CLASS	ID	LENGTH (little endian)	PayLoad	CK_A	CK_B
------------------	------------------	-------	----	------------------------	---------	------	------

The following introduces the commonly used UBX data packets.

1. UBX-NAV-POSLLH (0x01 0x02)

Message	NAV-POSLLH
---------	------------



Description		Geodetic Position Solution				
Message Structure		Header	Class	ID	Length (Bytes)	Checksum
		0xB5 0x62	0x01	0x02	28	see below CK_A CK_B
Payload Contents:						
Byte Off set	Number Format	Scaling	Name	Unit	Description	
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.	
4	I4	1e-7	lon	Deg	Longitude	
8	I4	1e-7	lon	Deg	Latitude	
12	I4	-	height	mm	Height above ellipsoid	
16	I4	-	oeLh	mm	Height above mean sea level	
20	U4	-	Hc	mm	Horizontal accuracy estimate	
twenty four	U4	-	vv	mm	Vertical accuracy estimate	

2. UBX-NAV-STATUS (0x01 0x03)

Message		NAV-STATUS				
Description		Receiver Navigation Status				
Message Structure		Header	Class	ID	Length (Bytes)	Checksum
		0xB5 0x62	0x01	0x03	16	see below CK_ACK_B
Payload Contents:						
Byte Of fset	Number Format	Scaling	Name	Unit	Description	
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.	



4	U1	-	gpsFix	-	GPSfix Type, this value does not qualify a fix as valid and within the limits. See note on flag gpsFixOk below. 0x00 = no fix 0x01 = dead reckoning only 0x02 = 2D-fix 0x03 = 3D-fix 0x04=GPS+dead reckoning combined 0x05 = Time only fix 0x06..0xff = reserved
5	X1	-	flags	-	Navigation Status Flags
6	X1	-	fixStat	-	Fix Status Information
7	X1	-	flags2	-	further information about navigation output
8	U4	-	ttff	ms	Time to first fix (millisecond time tag)
12	U4	-	msss	mm	Milliseconds since Startup/Reset

3. UBX-NAV-DOP (0x01 0x04)

Message	NAV-DOP					
Description	Dilution of precision					
Message Structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xB5 0x62	0x01	0x04	18	see below	CK_A CK_B
Payload Contents:						
Byte Off set	Number	Scaling	Name	Unit	Description	



	Format				
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.
4	U2	0.01	gDOP	-	Geometric DOP
6	U2	0.01	pDOP	-	Position DOP
8	U2	0.01	TDOP	-	Time DOP
10	U2	0.01	vDOP	-	Vertical DOP
12	U2	0.01	HkDOP	-	Horizontal DOP
14	U2	0.01	nDOP	-	Northing DOP
16	U2	0.01	eDOP	-	Easting DOP

4. UBX-NAV-SOL (0x01 0x06)

Message		NAV-SOL				
Description		Navigation Solution Information				
Message Structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xB5 0x62	0x01	0x06	52	see below	CK_A CK_B
Payload Contents:						
Byte Offset	Number Format	Scaling	Name	Unit	Description	
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.	
4	I4	-	f	ns	Fractional part of iTOW (range: +/-500000). The precise GPS time of week in seconds is: $(iTOW * 1e-3) + (fTOW * 1e-9)$	
8	I2	-	week	weeks	GPS week number of the navigation epoch	
10	U1	-	gpsFix	-	GPSfix Type, range 0..5 0x00 = No Fix	



					0x01 = Dead Reckoning only 0x02 = 2D-Fix 0x03 = 3D-Fix 0x04 = GPS + dead reckoning combined 0x05 = Time only fix 0x06..0xff: reserved
11	X1	-	flags	-	Fix Status Flags
12	I4	-	eX	cm	ECEF X coordinate
16	I4	-	eCE	cm	ECEF Y coordinate
20	I4	-	eCEf	cm	ECEF Z coordinate
24	U4	-	pAcc	cm	3D Position Accuracy Estimate
28	I4	-	xvX	cm/s	ECEF X velocity
32	I4	-	VxD	cm/s	ECEF Y velocity
36	I4	-	VxD	cm/s	ECEF Z velocity
40	U4	-	sAcc	cm/s	Speed Accuracy Estimate
44	U2	0.01	pDOP	-	Position DOP
46	U1	-	Reserve d1	-	Reserved
47	U1	-	numSV	-	Number of SVs used in Nav Solution

5. UBX-NAV-PVT (0x01 0x07)

Message	NAV-PVT					
Description	Navigation Position Velocity Time Solution					
Message Structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xB5 0x62	0x01	0x07	92	see below	CK_A CK_B
Payload Contents:						



Byte Offset	Number Format	Scaling	Name	Unit	Description
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.
4	U2	-	year	y	Year (UTC)
6	U1	-	month	month	Month, range 1..12 (UTC)
7	U1	-	day	d	Day of month, range 1..31 (UTC)
8	U1	-	hour	h	Hour of day, range 0..23 (UTC)
9	U1	-	min	min	Minute of hour, range 0..59 (UTC)
10	U1	-	sec	s	Seconds of minute, range 0..60 (UTC)
11	X1	-	valid	-	Validity flags (see graphic below)
12	U4	-	tAcc	ns	Time accuracy estimate (UTC)
16	I4	-	nano	ns	Fraction of second, range -1e9 .. 1e9 (UTC)
20	U1	-	fixType	-	GNSSfix Type: 0: no fix 1: dead reckoning only 2: 2D-fix 3: 3D-fix 4: GNSS + dead reckoning combined 5: time only fix
21	X1	-	Flags	-	Fix status flags
22	X1	-	flags2	-	Additional flags
23	U1	-	numSV	-	Number of satellites used in Nav Solution
24	I4	1e-7	lon	deg	Longitude
28	I4	1e-7	lat	deg	Latitude
32	I4	-	height	mm	Height above ellipsoid
36	I4	-	oeLh	mm	Height above mean sea level



40	U4	-	Hc	mm	Horizontal accuracy estimate
44	U4	-	vv	mm	Vertical accuracy estimate
48	I4	-	Nv	mm/s	NED north velocity
52	I4	-	ewE	mm/s	NED east velocity
56	I4	-	D	mm/s	NED down velocity
60	I4	-	gSpeed	mm/s	Ground Speed (2-D)
64	I4	1e-5	headMot	deg	Heading of motion (2-D)
68	U4	-	sAcc	mm/s	Speed accuracy estimate
72	U4	1e-5	headAcc	deg	Heading accuracy estimate (both motion and vehicle)
76	U2	0.01	pDOP	-	Position DOP
78	U1[6]	-	reserved1	-	Reserved
84	I4	1e-5	headVeh	deg	Heading of vehicle (2-D)
88	I2	1e-2	magDec	deg	Magnetic declination
90	U2	1e-2	magAcc	deg	Magnetic declination accuracy

6. UBX-NAV-VELNED (0x01 0x12)

Message		NAV-VELNED				
Description		Velocity Solution in NED				
Message Structure		Header	Class	ID	Length (Bytes)	Checksum
		0xB5 0x62	0x01	0x12	36	see below CK_A CK_B
Payload Contents:						
Byte Offset	Number Format	Scaling	Name	Unit	Description	
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.	



4	I4	-	Nv	cm/s	North velocity component
8	I4	-	ewE	cm/s	East velocity component
12	I4	-	D	cm/s	Down velocity component
16	U4	-	speed	cm/s	Speed (3-D)
20	U4	-	gSpeed	cm/s	Ground speed (2-D)
24	I4	1e-5	heading	deg	Heading of motion 2-D
28	U4	-	sAcc	cm/s	Speed accuracy Estimate
32	U4	1e-5	cC	deg	Course/Heading accuracy estimate

7. UBX-NAV-SAT (0x01 0x35)

Message		NAV-SAT					
Description		Satellite Information					
Message Structure		Header	Class	ID	Length (Bytes)	Payload	Checksum
		0xB5 0x62	0x01	0x35	8+12*nu mxD	see below	CK_A CK_B
Payload Contents:							
Byte Offset	Number Format	Scaling	Name	Unit	Description		
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.		
4	U1	-	version	-	Message version (1 for this version)		
5	U1	-	numSvs	-	Number of satellites		
6	U2	-	reserved1	-	Reserved		
8 + 12*N	U1	-	gnssId	-	GNSS identifier for assignment		
9 + 12*N	U1	-	svId	-	Satellite identifier for assignment		
10+ 12*N	U1	-	cno	dBHz	Carrier to noise ratio (signal strength)		



11+ 12*N	I1	-	elev	deg	Elevation (range: +/-90), unknown if out of range
12+ 12*N	I2	-	azim	deg	Azimuth(range 0-360), unknown if elevation is out of range
14+ 12*N	I2	0.1	prRes	m	Pseudo range residual
16+ 12*N	X4	-	flags	-	Bitmask

8.UBX-NAV-TIMEUTC (0x01 0x21)

Message		NAV-TIMEUTC					
Description		UTC Time Solution					
Message Structure		Header	Class	ID	Length (Bytes)	Payload	Checksum
		0xB5 0x62	0x01	0x21	20	see below	CK_A CK_B
Payload Contents:							
Byte Of fset	Number Format	Scaling	Name	Unit	Description		
0	U4	-	iTOW	ms	GPS time of week of the navigation epoch.		
4	U4	-	tAcc	ns	Time accuracy estimate (UTC)		
8	I4	-	nano	ns	Fraction of second, range -1e9 .. 1e9 (UTC)		
12	U2	-	year	y	Year, range 1999..2099 (UTC)		
14	U1	-	month	month	Month, range 1..12 (UTC)		
15	U1	-	day	d	Day of month, range 1..31 (UTC)		
16	U1	-	hour	h	Hour of day, range 0..23 (UTC)		
17	U1	-	min	min	Minute of hour, range 0..59 (UTC)		
18	U1	-	sec	s	Seconds of minute, range 0..60 (UTC)		
19	X1	-	valid		Validity Flags		

**9. UBX -MON-HW (0x0A 0x09)**

Message		MON-HW				
Description		Hardware Status				
Message Structure	Header	Class	ID	Length (Bytes)	Payload	Checksum
	0xB5 0x62	0x0A	0x09	60	see below	CK_A CK_B
Payload Contents:						
Byte Of fset	Number Format	Scaling	Name	Unit	Description	
0	X4	-	pinSel	-	Mask of Pins Set as Peripheral/PIO	
4	X4	-	pinBank	-	Mask of Pins Set as Bank A/B	
8	X4	-	pinDir	-	Mask of Pins Set as Input/Output	
12	X4	-	pinVal	-	Mask of Pins Value Low/High	
16	U2	-	noisePerMS	-	Noise Level as measured by the GPS Core	
18	U2	-	agc	-	AGC Monitor (counts SIGHI xor SIGLO, range 0 to 8191)	
20	U1	-	aStatus	-	Status of the Antenna Supervisor State Machine (0=INIT, 1=DONTKNOW, 2=OK, 3=SHORT,4=OPEN)	
twenty one	U1	-	aPower	-	Current PowerStatus of Antenna (0=OFF, 1=ON, 2=DONTKNOW)	
twenty two	X1	-	flags	-	Flags	
twenty three	U1	-	reserved1	-	Reserved	
twenty four	X4	-	usedMask	-	Mask of Pins that are used by the Virtual Pin Manager	
28	U1[17]	-	VP	-	Array of Pin Mappings for each of the 17 Physical Pins	
45	U1	-	jamInd	-	CW Jamming indicator, scaled (0 = no CW jamming, 255 = strong CW jamming)	



46	U1[2]	-	reserved2	-	Reserved
48	X4	-	pinIrq	-	Mask of Pins Value using the PIO Irq
52	X4	-	pullH	-	Mask of Pins Value using the PIO Pull High Resistor
56	X4	-	pullL	-	Mask of Pins Value using the PIO Pull Low Resistor

10. Geomagnetic output format

Message		Earth's magnetism				
Description		Output format of geomagnetic field				
Message Structure		Header	Class	Length (Bytes)	Payload	Checksum
		0x55 0xAA	0x01	06	see below	CK_A CK_B
Payload Contents:						
Byte Of fset	Number Format	Scaling	Name	Unit	Description	
0	I1	-	YAxis low position	mxD	GeomagneticYaxis	
1	I1	-	YAxis height	mxD	GeomagneticYaxis	
2	I1	-	XAxis low position	mxD	GeomagneticXaxis	
3	I1	-	XAxis height	mxD	GeomagneticXaxis	
4	I1	-	ZAxis low position	mxD	GeomagneticZaxis	
5	I1	-	ZAxis height	mxD	GeomagneticZaxis	



2.3 Reference Program

2.3.1 NMEA0183 Protocol Verification Reference Program

```
unsigned char Calc_GPS_Sum( const char* Buffer ) {

    unsigned char i, j, k, sum;
    sum = 0;
    for ( i = 1; i < 255; i++ ) //from1The beginning is to flash the $ start character {

        if ( ( Buffer[i] != '*' ) && ( Buffer[i] != 0x00 ) ) //Determine the end character {

            sum ^= Buffer[i]; //GPSThe checksum algorithm isXOR }

        else {

            break;

        }

    }

    j = Buffer[i + 1]; //Get the two characters after the terminator k = Buffer[i + 2];

    if ( isalpha( j ) ) //Determines whether the character is an English letter. If it is an English
letter, it returns a non-zero value, otherwise it returns zero. {
        if ( isupper( j ) ) //If the character is an uppercase English letter, it returns a non-
zero value, otherwise it returns zero {

            j -= 0x37; //Forced to16Base }

        else {

            j -= 0x57; //Forced to16Base }

        }

    else {

        if ( ( j >= 0x30 ) && ( j <= 0x39 ) ) {

            j -= 0x30; //Forced to16Base

        }

    }

    if ( isalpha( k ) ) //Determines whether the character is an English letter. If it is an English
letter, it returns a non-zero value, otherwise it returns zero. {
        if ( isupper( k ) ) //If the character is an uppercase English letter, it returns a non-
zero value, otherwise it returns zero {

            k -= 0x37; //Forced to16Base

        }

        else {

            k -= 0x57; //Forced to16Base

        }

    }

}
```



```
else {  
  
    if ( ( k >= 0x30 ) && ( k <= 0x39 ) ) {  
  
        k -= 0x30; //Forced to16Base }  
  
    }  
  
    j = ( j << 4 ) + k; //Force merge to16Base //  
    gps_sum = j;  
  
    if ( sum == j ){  
  
        return Valid; //Checksum OK  
    }  
    else {  
  
        return Invalid; //Checksum  
        Error }  
}
```

2.3.2 UBXProtocol Verification Reference Program

```
//fromCLASSarrivePayLoadAll data  
unsigned int CalcCheckAB(unsigned char *Bytes, unsigned char len) {  
  
    unsigned char i,a,b ;  
    unsigned int result;  
    result = 0;  
    a = 0;  
    b = 0;  
    for ( i = 0; i < len ; i++) {  
  
        a+=Bytes[i];  
        b+=a;  
    }  
    result = a<<8|b;  
    return result;  
}
```



3. Contact Us

Shenzhen BroadGNSS Technology Co., Ltd.

BroadGNSS Technology Co.,Ltd.



Contact: Mr. Li Mobile phone: 18988798557 QQ:843570942

Address: Room 402, Shengye Space, No. 52, Tiezai Road, Bao'an District, Shenzhen.



4. Appendix 1 (Test Method)

4.1 Overview

This document primarily introduces the basic testing methods for high-precision satellite positioning receivers. The main tests include checking whether the device powers on and functions properly, verifying data output, and assessing whether the positioning accuracy is within the expected range. These tests are applicable to devices with meter-level, sub-meter-level, and decimeter-level precision.

4.2 Test content

4.2.1 Test Preparation

- (1) Install the USB TO TTL serial port board driver (CH340);
- (2) Install the serial port tool on the PC, such as "sscom5.12 serial port tool";
- (3) Connect the serial port board to the locator, as shown below:

北斗GPS接收机 模块接口端		USB TO TTL 串口板		
黑线 GND	↔	GND		
红线 DC5V	↔	DC5V	↔	电脑USB端口
黄线 RX	↔	TX		
白线 TX	↔	RX		





- (4) Test environment with clear sky.
- (5) After completing the above steps, check the corresponding COM port driver in the Device Manager on the computer to ensure it is functioning properly, as shown in the image below:



4.2.2 Test steps

- (1) Open the serial port tool, such as "sscom5.12 Serial Port Tool" or HyperTerminal, and select the baud rate of 115200 and the corresponding COM port number, as shown below:



If the data exceeds 1MB, check the "Receive data to file" option. Before testing, also ensure the "Add carriage return and line feed" option is checked.

- (2) When the serial port outputs the following information, the device indicates successful positioning:

```
$GPRMC,033301.30,A,2236.361122,N,11351.963318,E,0.005,,280917,,,A*70
$GPRMC,033301.40,A,2236.361121,N,11351.963311,E,0.004,,280917,,,A*7C
$GPRMC,033301.50,A,2236.361124,N,11351.963312,E,0.008,,280917,,,A*77
$GPRMC,033301.60,A,2236.361124,N,11351.963312,E,0.004,,280917,,,A*78
$GPRMC,033301.70,A,2236.361123,N,11351.963306,E,0.004,,280917,,,A*7B
$GPRMC,033301.80,A,2236.361123,N,11351.963306,E,0.007,,280917,,,A*77
$GPRMC,033301.90,A,2236.361124,N,11351.963297,E,0.004,,280917,,,A*7B
$GPRMC,033302.00,A,2236.361124,N,11351.963297,E,0.006,,280917,,,A*73
```



```
$GPRMC,033302.10,A,2236.361123,N,11351.963296,E,0.005,,280917,,,A*77  
$GPRMC,033302.20,A,2236.361123,N,11351.963290,E,0.007,,280917,,,A*70  
$GPRMC,033302.30,A,2236.361123,N,11351.963290,E,0.005,,280917,,,A*73
```

4.2.3 Test Example

(1) Office test: 1/4 sky static test, as shown below:

Place the RAC high-precision satellite positioning receiver on a windowsill and securely mount it using a bracket. Connect it to the laptop. Turn off the indoor signal amplifier. Repeat the testing steps as outlined in the previous content.



Note: The measured data in this environment only verifies that the receiver can receive data normally and there is no hardware problem.

(2) Place the device on a vehicle and conduct a dynamic test while driving, as shown below:

Place the RAC high-precision satellite positioning receiver in the center of the center console under the windshield. (Note that the receiver should be placed with the front facing up) Connect the laptop. Repeat the above (test content) steps to test





(3) Placement method





V. Appendix 2 (Test Report)

5.1 Overview

This report describes the performance test results of the RAC high-precision satellite positioning receiver, including comparisons with RTK positioning technology under different environments. The RAC technology does not rely on any ground-based or space-based augmentation systems or inertial navigation technologies. It achieves decimeter-level dynamic positioning accuracy using only L1 or B1 frequency band signals, eliminating the need for ground-based augmentation networks in high-precision satellite positioning.

The technology comparison is shown in the table below:

Positioning Technology	Use Geography scope	Service Fee	Data charges	External antenna	Signal blocking environment	Use Operation	High Dynamics
RAC	Any in the world Place	none	none	none	Insensitive	Easy	support
RTD	Base station broadcast scope	have	have	have	sensitive	Registration required networking	Not supported
RTK	Ground-based network scope	have	have	have	sensitive	Registration required networking	Not supported

5.2 Test platform

To test and evaluate the performance of the RAC high-precision satellite positioning receiver in different environments and signal strengths, the specific tests are as follows:

Static Test with Actual Signal: Conduct testing for positioning accuracy and static drift range in an open area on the rooftop.

Dynamic Road Test with Actual Signal: Conduct long-duration, long-distance road tests under typical environmental conditions based on real-world signal conditions, including open road sections, tree-lined paths, overpasses, and other typical road scenarios.

RAC vs RTK Actual Comparison: Perform a road test under the same time and environmental conditions to compare the RAC device with the RTK device.

Equipment Preparation:

1 RAC-C1P unit

F9p + High-precision antenna (connected to Qianxun Zhiyun)

Equipment Installation:


Both the RAC-C1P and F9p devices are mounted in the center of the car roof.




5.3 Test Results

5.3.1 Static testing

In an open-sky environment, the RAC-C1P device was placed statically for 30 minutes, with a static absolute accuracy of less than 1 meter, as shown below:

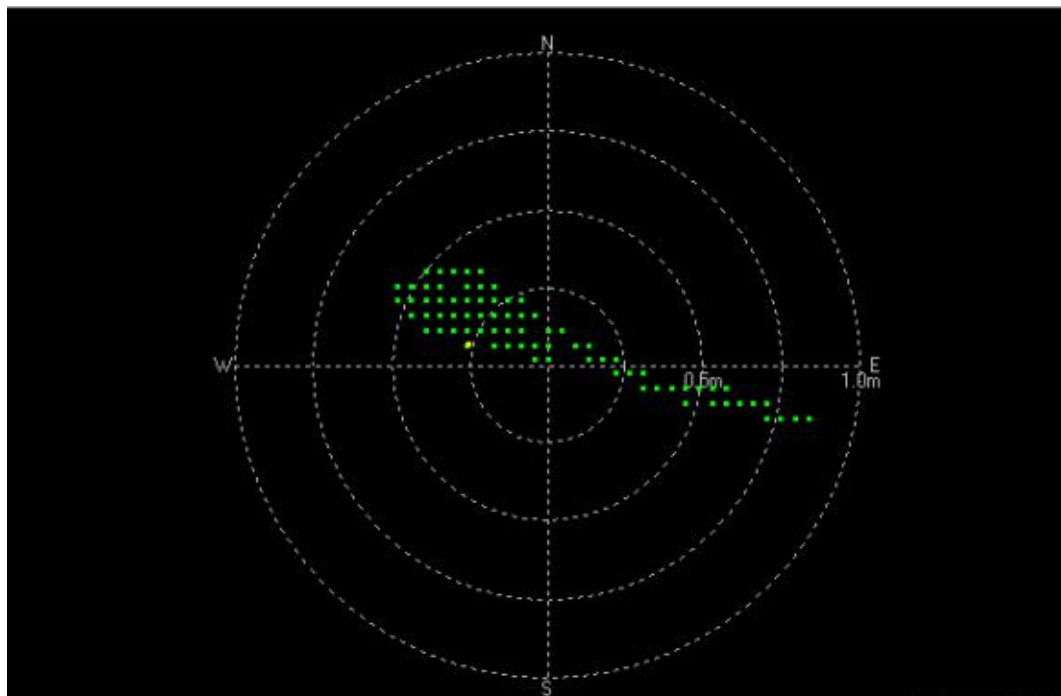

5.3.2 Dynamic testing (the trajectory is the test data imported into Google Earth for viewing)

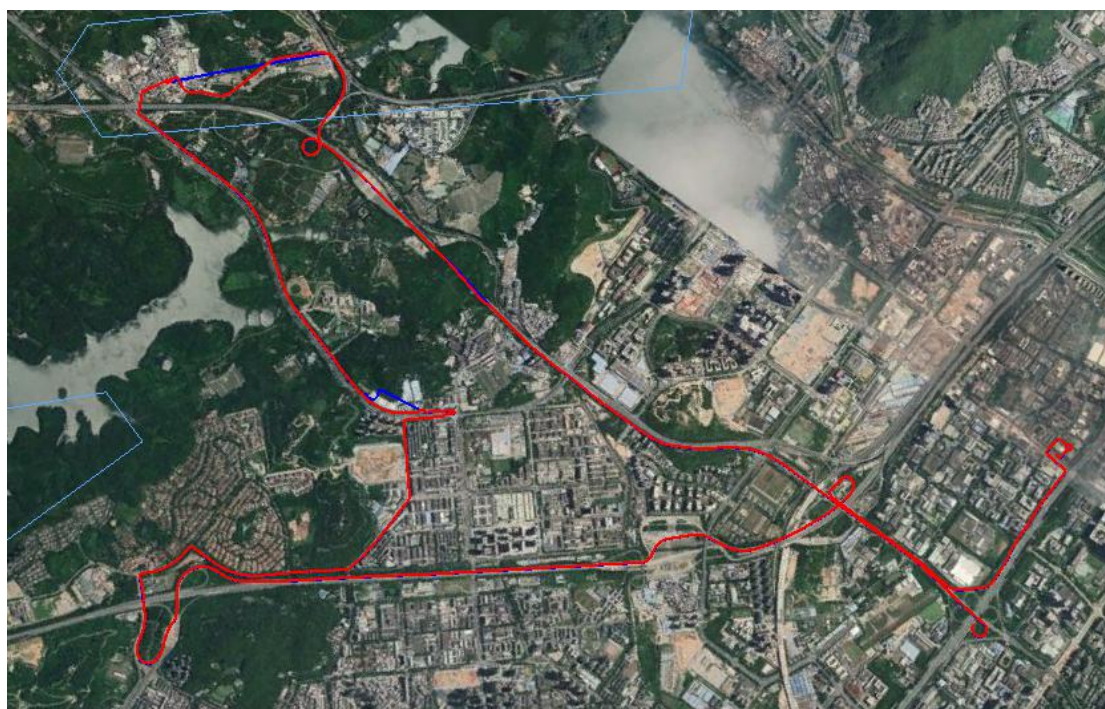

Overall test track




5.3.2.1 Open road test

Open Road Segment Test Trajectory:

Red: RAC-C1P Device

Blue: F9p Device

As shown in the trajectory, both devices' paths are nearly identical in the open road segment. There are no jump or outlier points. When comparing the RAC-C1P device to the F9p device, the error remains within 0.5 meters.

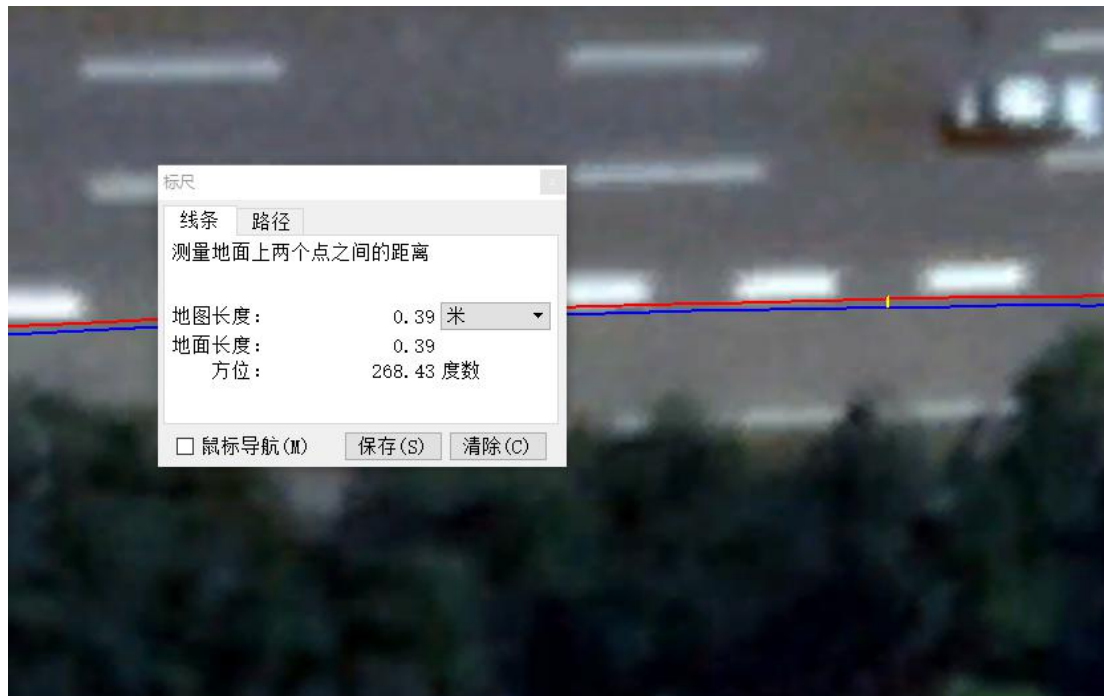

Red: RAC-C1P Blue: F9




5.3.2.2 Tree-lined road test

Overpass Road Condition Test:

Red: RAC-C1P Device

Blue: F9p Device

As shown in the test results, under the tree-lined curved road conditions, the RAC-C1P device and the F9p device maintain a largely overlapping trajectory. The positioning performance of both devices is comparable even in these challenging conditions.

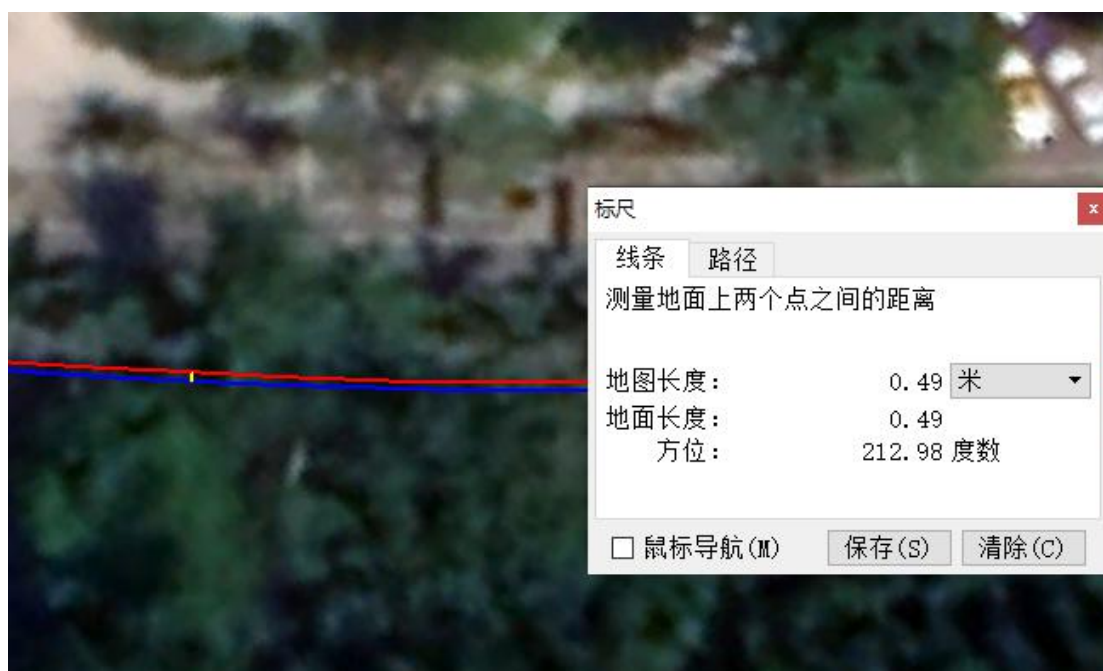

Red: RAC-C1P Blue: F9



5.3.2.3 Short-term occlusion test

Short-Term Signal Blockage Test:

Red: RAC-C1P Device

Blue: F9p Device


In the segment with temporary signal blockage, the RAC-C1P device maintains a smooth trajectory without any data loss, whereas the F9p device experiences jump points and data loss.

Data Comparison:

RAC-C1P: Consistent tracking, stable output even during signal occlusion.

F9p: Exhibits discontinuities in the trajectory, including data gaps and position jumps, demonstrating a lower tolerance for temporary signal blockage.

This comparison illustrates the RAC-C1P's superior ability to handle signal interruptions without significant tracking issues.

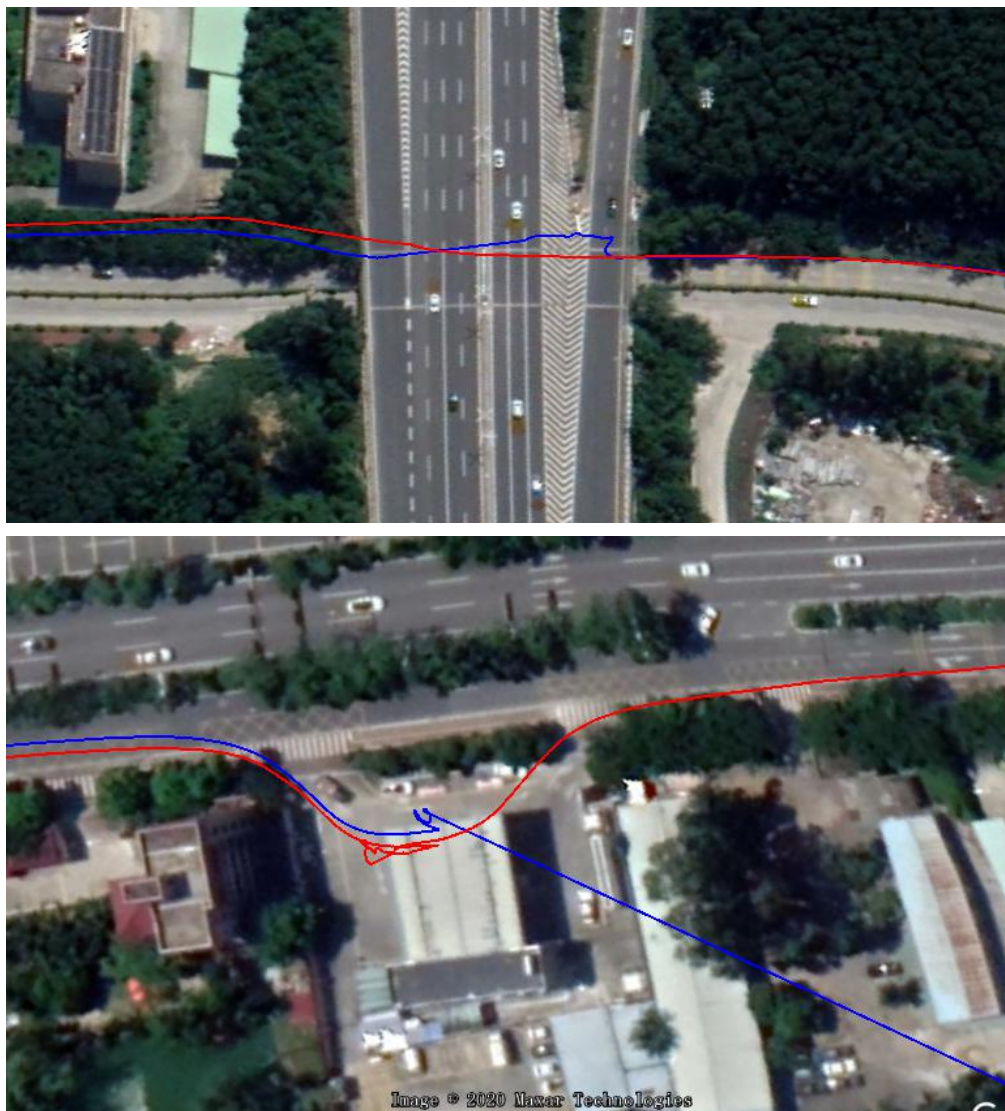

Red: RAC-C1P Blue: F9